



G3

Pulse Oximeter

- High resolution 2.8" color display
- Two display modes: big number and waveform
- Visual and audible alarms
- Philips SpO₂ technology
- Applications from neonate to adult
- Convenient protective cover



Pulse Oximeter

SpO₂

Philips SpO₂ Technology

Measurement range: 0%–100%

Accuracy: 70%–100%, depends on sensor
0%–69%, unspecified

Pulse Rate (PR)

Measurement range: 30 bpm–240 bpm

Accuracy: ±2 bpm or ±2%, whichever is greater

Display

Type: Color TFT LCD

Size: 2.8"

Resolution: 240 x 320 pixels

Waveform: Plethysmogram

Power Specification

Power input: (2) 1.5V, AA alkaline batteries

Safety Approval & Quality System

Safety standard: IEC60601-1: EN ISO 9919

Quality system: ISO9001 & ISO13485 certified

Protection Against Ingress of Liquid: IPX2

CE marking according to MDD93/42/EEC

Weight & Dimensions

Net weight: Approx. 240g (with battery)

Product dimensions: 131 mm (H) x 65 mm (W) x 29 mm (D)

Parameters


Standard: SpO₂ and PR

Data Review and Storage


500-set trend table, SpO₂ and PR

Languages

English, German, Polish, Turkish, Italian, French, Russian, Spanish, Portuguese, Czech, Finnish, Dutch, Swedish, Romanian, Danish, Norwegian, Hungarian

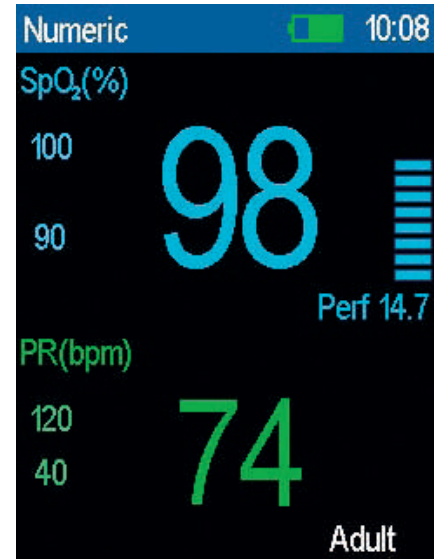

Big Number

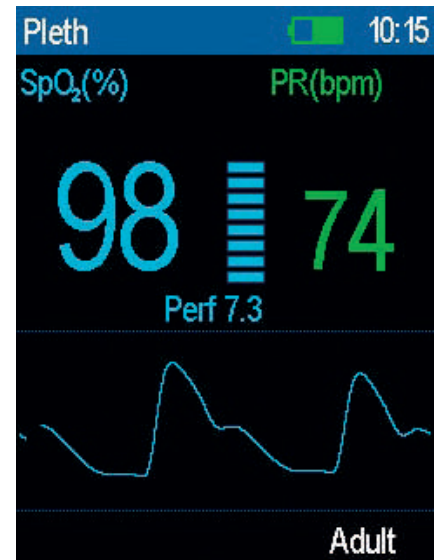

Waveform with Numerics

Specifications subject to change without notice.

Shenzhen Goldway Industrial Inc.

Goldway Building, No. 3 Road,
North Section, Shenzhen High-Tech
Industrial Park, Shenzhen,
PR. China 518057

Tel: +86 755 86278181

Fax: + 86 755 26980222

E-mail: goldwaymarketingsupport@philips.com

www.goldwayhealthcare.com

452296271991 (Rev.A)



Distributor:

